

# THE XTREME DIFFERENCE.

## Long Life Boom Rollers

Rollers eliminate chatter, delivering smoother boom operation



## 360° Visibility

Operator can view the entire working area around the telehandler



## 10-5-2 WARRANTY

10 YEARS OR 10,000 HOURS  
FRAME & CHASSIS WELDMENT

5 YEARS OR 5,000 HOURS  
BOOM WELDMENT & ROLLERS

2 YEARS OR 2,000 HOURS  
ENGINE, ELECTRICAL, TRANSMISSION,  
DRIVE AXLES & HYDRAULIC COMPONENTS

## Boom Lift Point

For safer handling of suspended loads



## Intuitive Operator Controls

Function boom and chassis sway controls with one arm



# CABS, TIRES, CARRIAGES, & ATTACHMENTS



## CAB OPTIONS

All Xtreme telehandlers are available with a choice of open cab, enclosed cab, or enclosed cab with heat and air conditioning.

Please speak with your Xtreme sales representative for more details.

## TIRE OPTIONS



### G2 FOAM FILLED

Offers great tread depth, the G2 tread clears debris for improved traction.



### E3 FOAM FILLED

Provides great traction and stability when run either off-road or on hard surfaces.



### XTREME SOLID TIRE

Xtreme solid tires provide a stable, cushioned, flat proof ride that is essential for both safety and productivity.



## FIXED CARRIAGE

Floating forks and adjustable side-to-side for efficient load entry and exit.

- Range from 48" to 96"



## SWING CARRIAGE

Allows for greater versatility in moving and placing materials in confined areas or when exact positioning is required.

- Range from 52" to 72"



## SIDE SHIFT CARRIAGE

Four-inch left and right carriage shift allows for precision load placement.

- Range from 48" to 96"



## ADJUSTABLE CARRIAGE

Fork positioning provides the ability to adjust the position of the forks, allowing the operator to handle a variety of loads without having to leave the cab.

- Range from 48" to 111"



## SIDE TILT CARRIAGE

Tilts loads from side-to-side and allows for minor lateral positioning of the load during final placement.

- Range from 48" to 72"



## PIPE & POLE GRAPPLE

Designed for handling multiple pipes or larger single pipe.

- Range from 72" to 96"
- Available with and without shoe



## PALLET FORK

Rugged fork design makes it easier to handle heavy palletized material.



## LUMBER FORK

Wide forks provide a larger surface area for stability when transporting larger materials.



## CUBING FORK

Allows operator to handle cubes of brick and block with ease.



## PERSONNEL PLATFORM

Extend the capabilities of your Xtreme telehandler by lifting personnel and materials.

- Range from 4'x4' to 8'x8'



## TRUSS BOOM

Allows operator to set trusses and wall sections for wood and steel building construction.

- Range from 3' to 15'
- Available with and without winch



## SLING MOUNT

Provides ability to handle suspended loads. Pick and tilt for precise load placement.



## PINTEL HOOK

Versatile tow point for movement of equipment and material.



## GENERAL PURPOSE BUCKET

Material bucket to carry loose dirt, materials and debris. The bucket can also be used for clean up around the job site.

- Range from 1.00yd to 2.00yd
- Available with or without bolt on cutting edge



## GRAPPLE BUCKET

Features a hydraulic grapple arm to secure bulky loads and assist in job site clean up.



## TIRE MANIPULATOR

Designed for the safe installation and removal of wheel assemblies from large construction and mining equipment, this fully integrated attachment utilizes Xtreme's existing in-cab controls for safe and seamless operation. The tire manipulator attachment is available to fit Xtreme telehandler models XR1055 and larger.



## ROTOBEC

This pipe and pole grapple is used for vertical and horizontal material placement. It is a safe and efficient alternative for handling installation of everything from utility poles to gas pipelines.



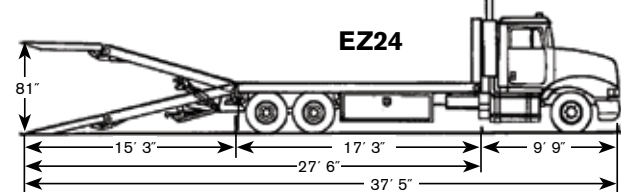
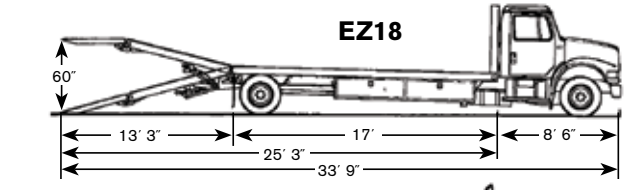
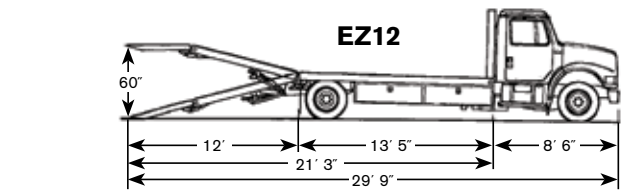
# XTREME E-Z LOADER

# CUSTOM DELIVERY TRUCK BEDS



- BULKHEAD BOLTED TO FRAME
- TRACTION PLATE FULL RAMP
- 17 SECOND RAMP DEPLOYMENT
- DOCK LOADING ABILITY

XTREME MANUFACTURING	EZ12	EZ18	EZ24
Bed capacity	12,000 lbs	18,000 lbs	24,000 lbs
Dove tail lift capacity	8,000 lbs	10,000 lbs	15,000 lbs
Tow capacity	5,000 lbs	8,000 lbs	10,000 lbs
Approximate G.V.W.	26,000 lbs	33,000 lbs	48,000 lbs
Hydraulic P.T.O.	14 GPM	14 GPM	14 GPM
Overall bed (W x L)	8' 6" x 21' 3"	8' 6" x 25' 3"	8' 6" x 27' 6"
Main bed (W x L)	8' 6" x 13' 5"	8' 6" x 17"	8' 6" x 17' 3"
Dove tail (W x L)	8' 6" x 7' 5"	8' 6" x 8"	8' 6" x 10"
Flip tail (W x L)	8' 6" x 4' 7"	8' 6" x 5' 3"	8' 6" x 5' 3"
Bulk head height	5'	5'	5'
Cab to axle length	11' 6"	15' 5"	13' 8"
Ramp length	11' 11"	13' 4"	14' 9"
Bed height	3' 5"	3' 10"	4'
Max dock height	5' 5"	5' 6"	6' 3"
Ramp angle	18° / 32%	18° / 32%	15° / 27%
Hitch receiver tube	2"	2"	2"
Wood thickness	1"	1"	1"



## LEGEND FOR CONTROL VALVE



## OPTIONAL CENTER TIE DOWNS



## OPTIONAL HYDRAULIC WINCH



# XTREME MANUFACTURING

## TELEHANDLERS

TELEHANDLERS SPECIFICATIONS • FEATURES • ATTACHMENTS

Xtreme telehandlers are proudly manufactured in Henderson, Nevada, USA, and are sold and serviced throughout the USA, Canada, Latin America, Australia, and beyond.

Learn more and request a quote online at [www.xmfg.com](http://www.xmfg.com).



XTREME MANUFACTURING, LLC  
8350 Eastgate Road, Henderson, NV 89015, USA

T: +1 (702) 636.2969  
T: +1 (800) 494.1704 (toll-free)



Specifications subject to change without notice. Photos, diagrams and load charts in this brochure are for promotional purposes only. Refer to the appropriate Xtreme operation manual for detailed instructions on proper use, specifications, and maintenance of equipment. Weight of machines is based on open cab model with foam filled tires.

## WE DON'T DO AVERAGE.

At Xtreme Manufacturing, we build the largest range of heavy duty and high capacity telehandlers in North America. And we build them to outlast and outperform anything else in the industry — period. In fact, we set the standard for safety, productivity and reliability. Plus, we back all of our telehandlers up with an unmatched **10 year - 5 year - 2 year warranty.**



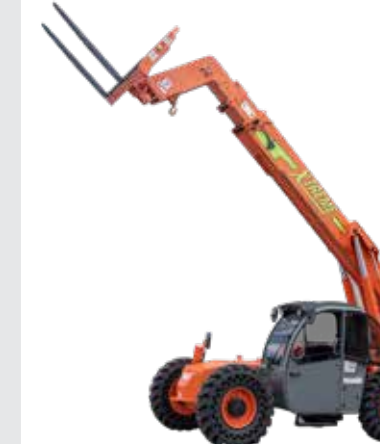

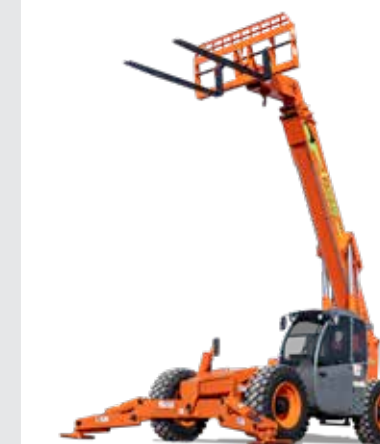
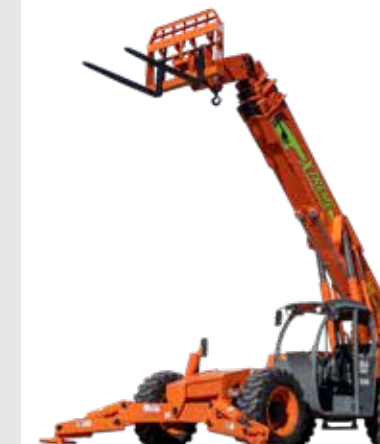
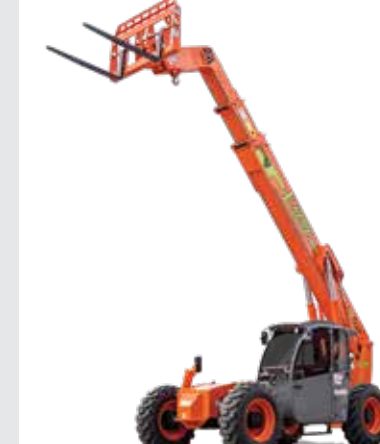

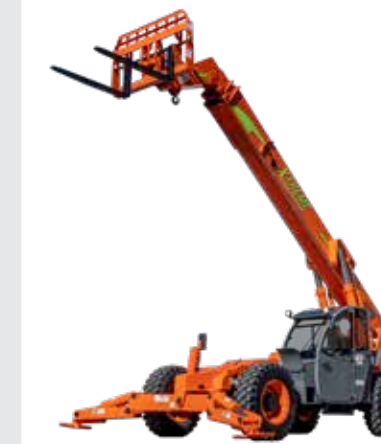

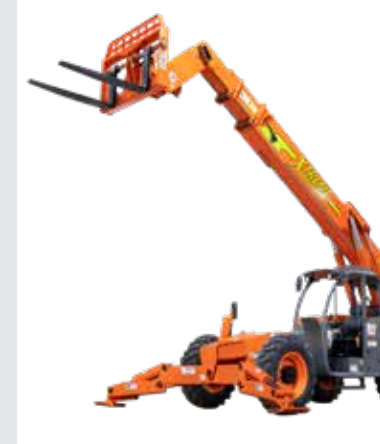
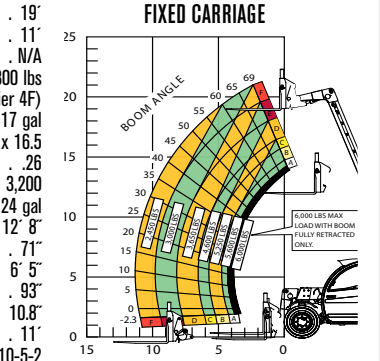
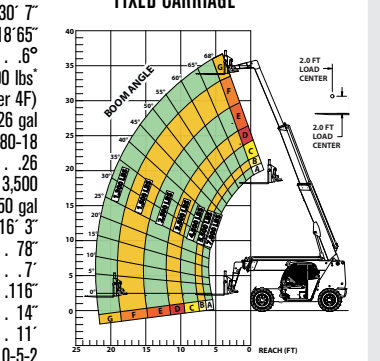
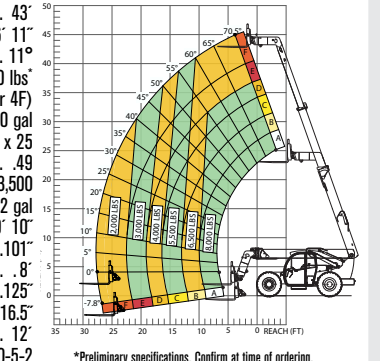
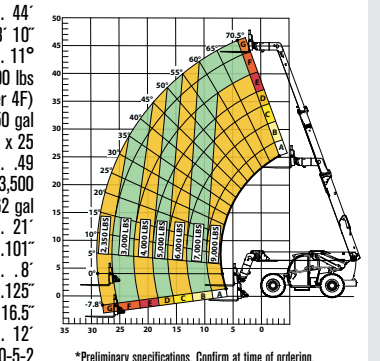
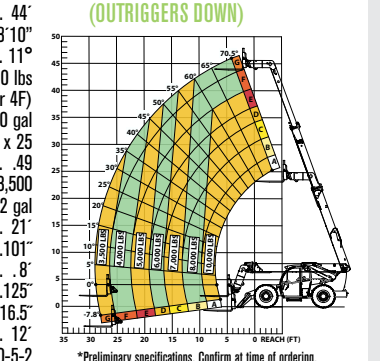
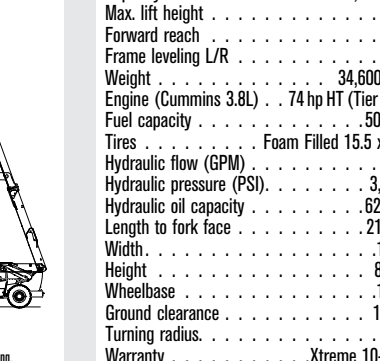
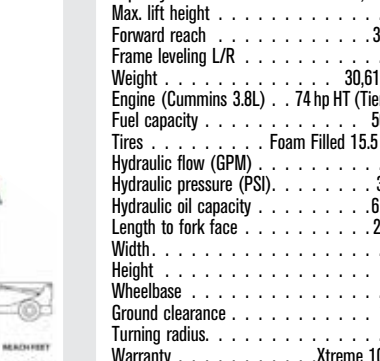
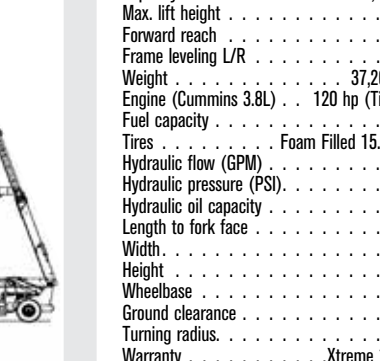
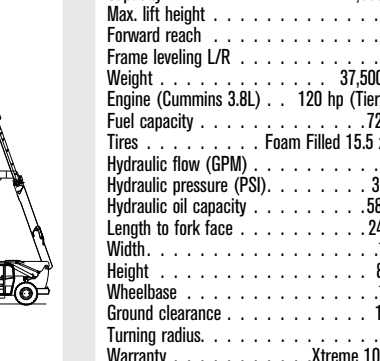
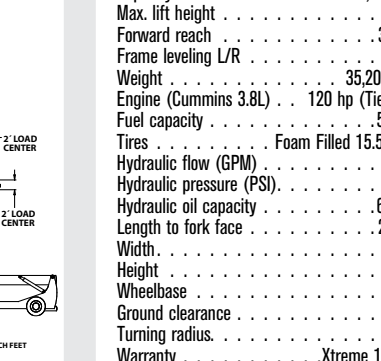
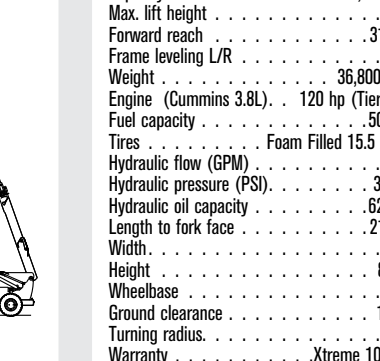
Downtime is the enemy of any jobsite. So, we design our machines to be super heavy duty and very low maintenance, greatly reducing downtime and lowering total ownership costs across the life of the machine. But we're not just tough, we're smart, too. Xtreme telehandlers feature cabs with 360-degree operator visibility, and intuitive controls so operators can keep one hand on the steering wheel at all times. Because safety is as important to us as strength. It's not about meeting industry standards, it's about setting them. Because we don't do average. **And that's what makes us different.**


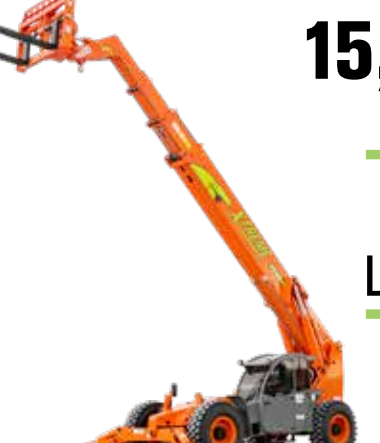
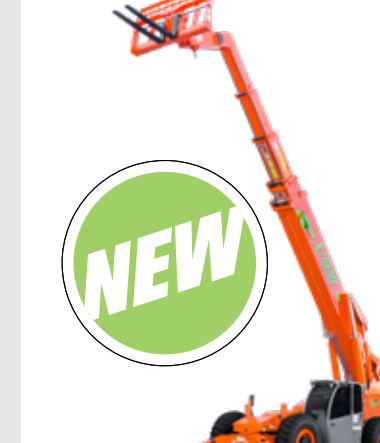

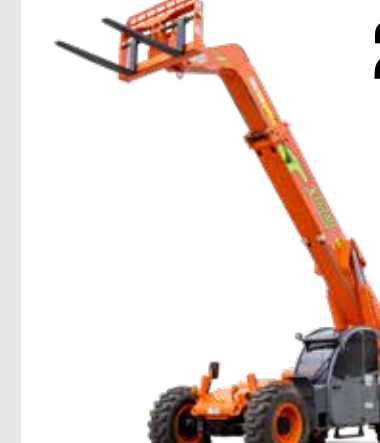
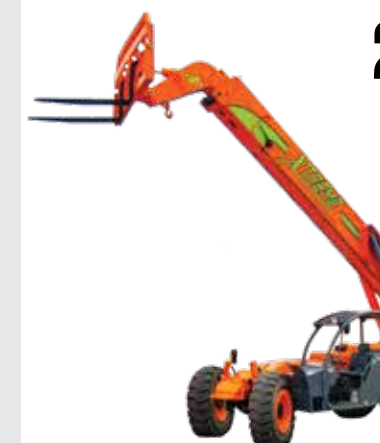
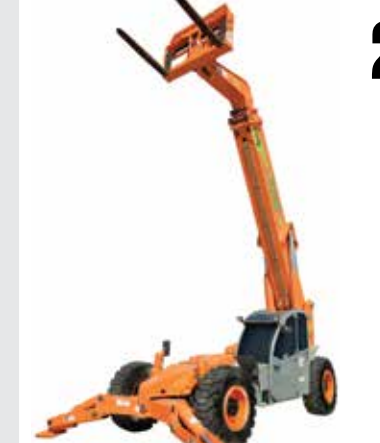
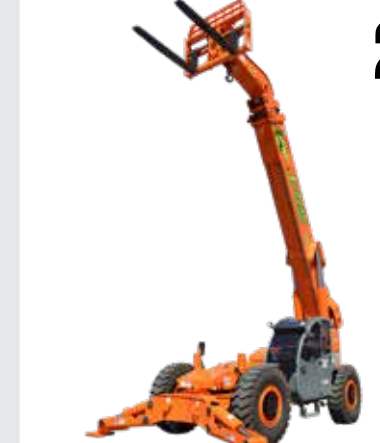
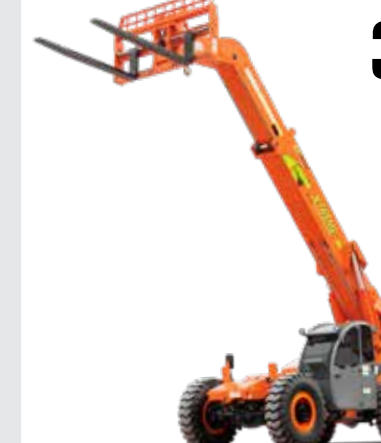
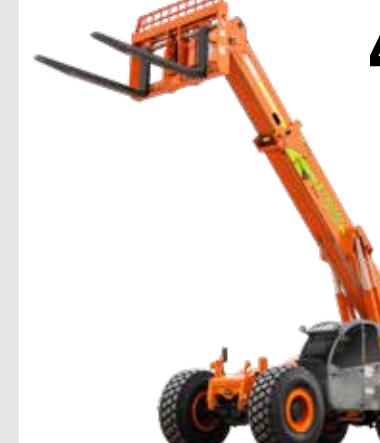

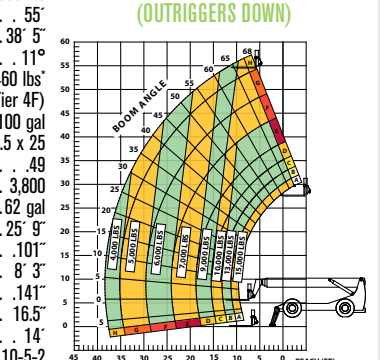
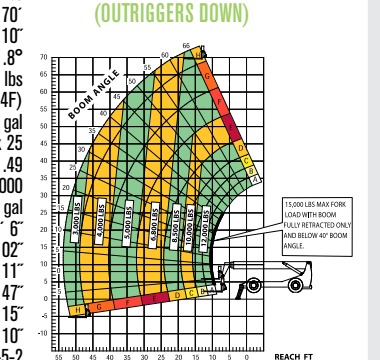
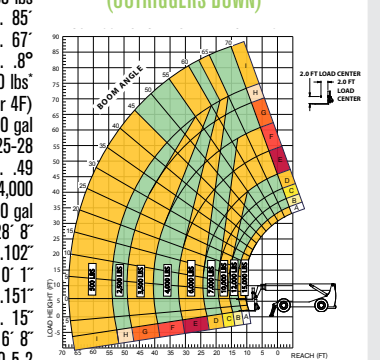
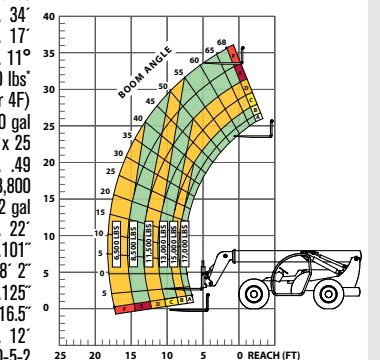
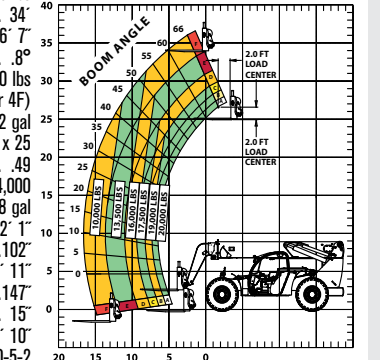
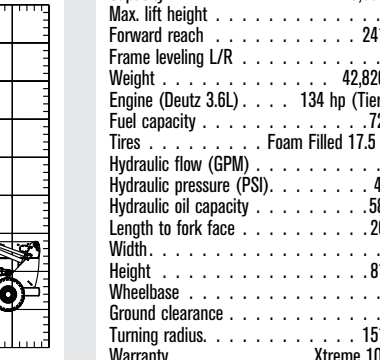
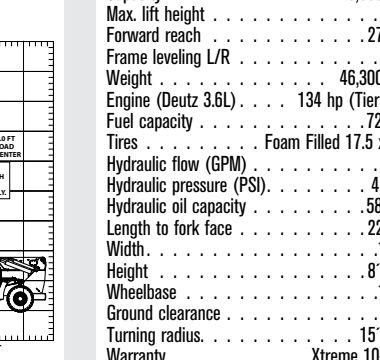
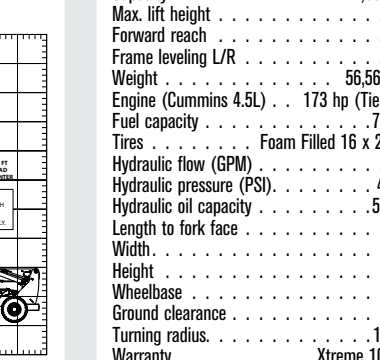
\*Standard features may vary across individual models. Consult your sales representative for more details.

## STANDARD FEATURES\*

- Long life boom rollers
- 360° visibility
- Boom lift point
- Intuitive operator controls
- Standard auxiliary hydraulics
- Solid steel plate chassis
- Steel dash
- Ductile steel manifold
- Easy cab mounted grab handles
- Reliable tier 4 compliant engines
- Master disconnect switch
- Axle mounted outriggers
- Wider outrigger stance
- Large cross section boom
- Easy tie downs
- Heavy duty pre-cleaner
- Additional high pressure hydraulic filter
- Direct engine/transmission connection
- Display screen
- Suspension seat
- Easy service access
- Protected tilt & extend cylinders
- Steel hydraulic & fuel tanks
- Long life Lexan labels
- Heavy duty boom chains
- Suspended pedals
- Electrical ring terminals
- Large capacity fuel tanks
- Trunnion mounted sway cylinders
- Melomite pins
- Rear axle stabilization (RAS)
- Center mounted power train



<b>A CLASS</b> <b>CARRIAGE</b> <b>XR619-A</b> <b>COMPACT ROLLER BOOM</b>	<b>A CLASS</b> <b>CARRIAGE</b> <b>XR630-A</b> <b>COMPACT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR843-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR944-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR1044-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR1055-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR1147-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR1247-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>B CLASS</b> <b>CARRIAGE</b> <b>XR1255-B</b> <b>HIGH PIVOT ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1347-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1547-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>																																																																																																																																																																																																																																																																																																																																																																																																												
 <p><b>6,000 LBS CAPACITY</b> <b>19 FT LIFT HEIGHT</b> <b>74 HP</b></p> <p>Previously known as XR5919</p>	 <p><b>6,000 LBS CAPACITY</b> <b>30 FT LIFT HEIGHT</b> <b>74 HP</b></p>	 <p><b>8,000 LBS CAPACITY</b> <b>43 FT LIFT HEIGHT</b> <b>74 HP HT</b> <small>OPTIONAL 120 HP</small></p>	 <p><b>9,000 LBS CAPACITY</b> <b>44 FT LIFT HEIGHT</b> <b>74 HP HT</b> <small>OPTIONAL 120 HP</small></p>	 <p><b>10,000 LBS CAPACITY</b> <b>44 FT LIFT HEIGHT</b> <b>74 HP HT</b> <small>OPTIONAL 120 HP</small></p>	 <p><b>10,000 LBS CAPACITY</b> <b>55 FT LIFT HEIGHT</b> <b>74 HP HT</b> <small>OPTIONAL 120 HP</small></p>	 <p><b>11,000 LBS CAPACITY</b> <b>47 FT LIFT HEIGHT</b> <b>74 HP HT</b> <small>OPTIONAL 120 HP</small></p>	 <p><b>12,000 LBS CAPACITY</b> <b>47 FT LIFT HEIGHT</b> <b>120 HP</b></p>	 <p><b>12,000 LBS CAPACITY</b> <b>55 FT LIFT HEIGHT</b> <b>120 HP</b></p>	 <p><b>13,000 LBS CAPACITY</b> <b>47 FT LIFT HEIGHT</b> <b>120 HP</b></p>	 <p><b>15,000 LBS CAPACITY</b> <b>47 FT LIFT HEIGHT</b> <b>120 HP</b></p>																																																																																																																																																																																																																																																																																																																																																																																																												
<table border="0"> <tr><td>Capacity</td><td>6,000 lbs</td></tr> <tr><td>Max. lift height</td><td>19' 7"</td></tr> <tr><td>Forward reach</td><td>11'</td></tr> <tr><td>Frame leveling L/R</td><td>N/A</td></tr> <tr><td>Weight</td><td>10,300 lbs</td></tr> <tr><td>Engine (Deutz 2.9L)</td><td>74 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>17 gal</td></tr> <tr><td>Tires</td><td>Pneumatic 12.00 x 16.5</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>26</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,200</td></tr> <tr><td>Hydraulic oil capacity</td><td>24 gal</td></tr> <tr><td>Length to fork face</td><td>12' 6"</td></tr> <tr><td>Width</td><td>7' 1"</td></tr> <tr><td>Height</td><td>7' 8"</td></tr> <tr><td>Wheelbase</td><td>93"</td></tr> <tr><td>Ground clearance</td><td>10.8"</td></tr> <tr><td>Turning radius</td><td>11'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	6,000 lbs	Max. lift height	19' 7"	Forward reach	11'	Frame leveling L/R	N/A	Weight	10,300 lbs	Engine (Deutz 2.9L)	74 hp (Tier 4F)	Fuel capacity	17 gal	Tires	Pneumatic 12.00 x 16.5	Hydraulic flow (GPM)	26	Hydraulic pressure (PSI)	3,200	Hydraulic oil capacity	24 gal	Length to fork face	12' 6"	Width	7' 1"	Height	7' 8"	Wheelbase	93"	Ground clearance	10.8"	Turning radius	11'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>6,000 lbs</td></tr> <tr><td>Max. lift height</td><td>30' 7"</td></tr> <tr><td>Forward reach</td><td>18.65'</td></tr> <tr><td>Frame leveling L/R</td><td>5°</td></tr> <tr><td>Weight</td><td>13,700 lbs</td></tr> <tr><td>Engine (Deutz 2.9L)</td><td>74 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>28 gal</td></tr> <tr><td>Tires</td><td>Pneumatic 12.5/160-18</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>26</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>50 gal</td></tr> <tr><td>Length to fork face</td><td>16' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>7' 8"</td></tr> <tr><td>Wheelbase</td><td>116"</td></tr> <tr><td>Ground clearance</td><td>14"</td></tr> <tr><td>Turning radius</td><td>11'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	6,000 lbs	Max. lift height	30' 7"	Forward reach	18.65'	Frame leveling L/R	5°	Weight	13,700 lbs	Engine (Deutz 2.9L)	74 hp (Tier 4F)	Fuel capacity	28 gal	Tires	Pneumatic 12.5/160-18	Hydraulic flow (GPM)	26	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	50 gal	Length to fork face	16' 3"	Width	10' 1"	Height	7' 8"	Wheelbase	116"	Ground clearance	14"	Turning radius	11'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>8,000 lbs</td></tr> <tr><td>Max. lift height</td><td>43'</td></tr> <tr><td>Forward reach</td><td>26' 11"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>27,000 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>74 hp HT (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>20' 10"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8'</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	8,000 lbs	Max. lift height	43'	Forward reach	26' 11"	Frame leveling L/R	11°	Weight	27,000 lbs	Engine (Cummins 3.8L)	74 hp HT (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	20' 10"	Width	10' 1"	Height	8'	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>9,000 lbs</td></tr> <tr><td>Max. lift height</td><td>44'</td></tr> <tr><td>Forward reach</td><td>28' 10"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>28,700 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>74 hp HT (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21'</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 9"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	9,000 lbs	Max. lift height	44'	Forward reach	28' 10"	Frame leveling L/R	11°	Weight	28,700 lbs	Engine (Cummins 3.8L)	74 hp HT (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21'	Width	10' 1"	Height	8' 9"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>10,000 lbs</td></tr> <tr><td>Max. lift height</td><td>44'</td></tr> <tr><td>Forward reach</td><td>28' 10"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>31,320 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>74 hp HT (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 4"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 9"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	10,000 lbs	Max. lift height	44'	Forward reach	28' 10"	Frame leveling L/R	11°	Weight	31,320 lbs	Engine (Cummins 3.8L)	74 hp HT (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 4"	Width	10' 1"	Height	8' 9"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>10,000 lbs</td></tr> <tr><td>Max. lift height</td><td>55'</td></tr> <tr><td>Forward reach</td><td>39'</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>34,600 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>74 hp HT (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 4"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 9"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	10,000 lbs	Max. lift height	55'	Forward reach	39'	Frame leveling L/R	11°	Weight	34,600 lbs	Engine (Cummins 3.8L)	74 hp HT (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 4"	Width	10' 1"	Height	8' 9"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>11,000 lbs</td></tr> <tr><td>Max. lift height</td><td>47'</td></tr> <tr><td>Forward reach</td><td>31' 6"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>30,610 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>74 hp HT (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 1"</td></tr> <tr><td>Wheelbase</td><td>141"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	11,000 lbs	Max. lift height	47'	Forward reach	31' 6"	Frame leveling L/R	11°	Weight	30,610 lbs	Engine (Cummins 3.8L)	74 hp HT (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 3"	Width	10' 1"	Height	8' 1"	Wheelbase	141"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>12,000 lbs</td></tr> <tr><td>Max. lift height</td><td>47'</td></tr> <tr><td>Forward reach</td><td>31' 6"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>37,200 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 1"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	12,000 lbs	Max. lift height	47'	Forward reach	31' 6"	Frame leveling L/R	11°	Weight	37,200 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 3"	Width	10' 1"	Height	8' 1"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>12,000 lbs</td></tr> <tr><td>Max. lift height</td><td>55'</td></tr> <tr><td>Forward reach</td><td>38'</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>37,500 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 1"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>14'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	12,000 lbs	Max. lift height	55'	Forward reach	38'	Frame leveling L/R	11°	Weight	37,500 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 3"	Width	10' 1"	Height	8' 1"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	14'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>13,000 lbs</td></tr> <tr><td>Max. lift height</td><td>47'</td></tr> <tr><td>Forward reach</td><td>31' 6"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>35,200 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 1"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	13,000 lbs	Max. lift height	47'	Forward reach	31' 6"	Frame leveling L/R	11°	Weight	35,200 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 3"	Width	10' 1"	Height	8' 1"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>15,000 lbs</td></tr> <tr><td>Max. lift height</td><td>47'</td></tr> <tr><td>Forward reach</td><td>31' 6"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>36,800 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>21' 3"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 1"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	15,000 lbs	Max. lift height	47'	Forward reach	31' 6"	Frame leveling L/R	11°	Weight	36,800 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,500	Hydraulic oil capacity	62 gal	Length to fork face	21' 3"	Width	10' 1"	Height	8' 1"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2
Capacity	6,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	19' 7"																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	11'																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	N/A																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	10,300 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Deutz 2.9L)	74 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	17 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Pneumatic 12.00 x 16.5																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	26																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,200																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	24 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	12' 6"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	7' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	7' 8"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	93"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	10.8"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	11'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	6,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	30' 7"																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	18.65'																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	5°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	13,700 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Deutz 2.9L)	74 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	28 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Pneumatic 12.5/160-18																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	26																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	16' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	7' 8"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	116"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	14"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	11'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	8,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	43'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	26' 11"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	27,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	74 hp HT (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	20' 10"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8'																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	9,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	44'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	28' 10"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	28,700 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	74 hp HT (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21'																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 9"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	10,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	44'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	28' 10"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	31,320 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	74 hp HT (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 4"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 9"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	10,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	55'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	39'																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	34,600 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	74 hp HT (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 4"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 9"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	11,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	47'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	31' 6"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	30,610 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	74 hp HT (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	141"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	12,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	47'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	31' 6"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	37,200 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	12,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	55'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	38'																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	37,500 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	14'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	13,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	47'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	31' 6"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	35,200 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					
Capacity	15,000 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Max. lift height	47'																																																																																																																																																																																																																																																																																																																																																																																																																					
Forward reach	31' 6"																																																																																																																																																																																																																																																																																																																																																																																																																					
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																																																																																																																					
Weight	36,800 lbs																																																																																																																																																																																																																																																																																																																																																																																																																					
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																																																																																																																					
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic pressure (PSI)	3,500																																																																																																																																																																																																																																																																																																																																																																																																																					
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																																																																																																																					
Length to fork face	21' 3"																																																																																																																																																																																																																																																																																																																																																																																																																					
Width	10' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Height	8' 1"																																																																																																																																																																																																																																																																																																																																																																																																																					
Wheelbase	125"																																																																																																																																																																																																																																																																																																																																																																																																																					
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																																																																																																																					
Turning radius	12'																																																																																																																																																																																																																																																																																																																																																																																																																					
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																																																																																																																					

<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1555-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1570-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1585-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR1734-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR2034-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR2042-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>C CLASS</b> <b>CARRIAGE</b> <b>XR2045-C</b> <b>HIGH CAPACITY ROLLER BOOM</b>	<b>D CLASS</b> <b>CARRIAGE</b> <b>XR2450-D</b> <b>ULTRA HIGH CAPACITY ROLLER BOOM</b>	<b>D CLASS</b> <b>CARRIAGE</b> <b>XR3034-D</b> <b>ULTRA HIGH CAPACITY ROLLER BOOM</b>	<b>E CLASS</b> <b>CARRIAGE</b> <b>XR4030-E</b> <b>XTREME CAPACITY ROLLER BOOM</b>	<b>F CLASS</b> <b>CARRIAGE</b> <b>XR7038-F</b> <b>ULTRA XTREME CAPACITY ROLLER BOOM</b>																																																																																																																																																																																																																																																																																																																						
 <p><b>15,000 LBS CAPACITY</b> <b>55 FT LIFT HEIGHT</b> <b>120 HP</b></p>	 <p><b>15,000 LBS CAPACITY</b> <b>70 FT LIFT HEIGHT</b> <b>134 HP</b></p>	 <p><b>15,000 LBS CAPACITY</b> <b>85 FT LIFT HEIGHT</b> <b>173 HP</b></p>	 <p><b>17,000 LBS CAPACITY</b> <b>34 FT LIFT HEIGHT</b> <b>120 HP</b></p>	 <p><b>20,000 LBS CAPACITY</b> <b>34 FT LIFT HEIGHT</b> <b>134 HP</b></p>	 <p><b>20,000 LBS CAPACITY</b> <b>42 FT LIFT HEIGHT</b> <b>134 HP</b></p>	 <p><b>20,000 LBS CAPACITY</b> <b>45 FT LIFT HEIGHT</b> <b>134 HP</b></p>	 <p><b>24,000 LBS CAPACITY</b> <b>50 FT LIFT HEIGHT</b> <b>173 HP</b></p>	 <p><b>30,000 LBS CAPACITY</b> <b>34 FT LIFT HEIGHT</b> <b>173 HP</b></p>	 <p><b>40,000 LBS CAPACITY</b> <b>30 FT LIFT HEIGHT</b> <b>173 HP</b></p>	 <p><b>70,000 LBS CAPACITY</b> <b>38 FT LIFT HEIGHT</b> <b>300 HP</b></p>																																																																																																																																																																																																																																																																																																																						
<table border="0"> <tr><td>Capacity</td><td>15,000 lbs</td></tr> <tr><td>Max. lift height</td><td>55'</td></tr> <tr><td>Forward reach</td><td>38' 5"</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>38,450 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>100 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,800</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>25' 9"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 3"</td></tr> <tr><td>Wheelbase</td><td>141"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>14'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	15,000 lbs	Max. lift height	55'	Forward reach	38' 5"	Frame leveling L/R	11°	Weight	38,450 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	100 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,800	Hydraulic oil capacity	62 gal	Length to fork face	25' 9"	Width	10' 1"	Height	8' 3"	Wheelbase	141"	Ground clearance	16.5"	Turning radius	14'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>15,000 lbs</td></tr> <tr><td>Max. lift height</td><td>70'</td></tr> <tr><td>Forward reach</td><td>53' 10"</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>48,480 lbs</td></tr> <tr><td>Engine (Deutz 3.6L)</td><td>134 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 17.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,000</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>26' 6"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>10' 2"</td></tr> <tr><td>Wheelbase</td><td>147"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>15' 10"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	15,000 lbs	Max. lift height	70'	Forward reach	53' 10"	Frame leveling L/R	8°	Weight	48,480 lbs	Engine (Deutz 3.6L)	134 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 17.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,000	Hydraulic oil capacity	58 gal	Length to fork face	26' 6"	Width	10' 1"	Height	10' 2"	Wheelbase	147"	Ground clearance	15'	Turning radius	15' 10"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>15,000 lbs</td></tr> <tr><td>Max. lift height</td><td>85'</td></tr> <tr><td>Forward reach</td><td>67'</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>65,500 lbs</td></tr> <tr><td>Engine (Cummins 4.5L)</td><td>173 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>100 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 16 x 25-28</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,000</td></tr> <tr><td>Hydraulic oil capacity</td><td>70 gal</td></tr> <tr><td>Length to fork face</td><td>28' 8"</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>10' 2"</td></tr> <tr><td>Wheelbase</td><td>147"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>16' 8"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	15,000 lbs	Max. lift height	85'	Forward reach	67'	Frame leveling L/R	8°	Weight	65,500 lbs	Engine (Cummins 4.5L)	173 hp (Tier 4F)	Fuel capacity	100 gal	Tires	Foam Filled 16 x 25-28	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,000	Hydraulic oil capacity	70 gal	Length to fork face	28' 8"	Width	10' 1"	Height	10' 2"	Wheelbase	147"	Ground clearance	15'	Turning radius	16' 8"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>17,000 lbs</td></tr> <tr><td>Max. lift height</td><td>34'</td></tr> <tr><td>Forward reach</td><td>17'</td></tr> <tr><td>Frame leveling L/R</td><td>11°</td></tr> <tr><td>Weight</td><td>33,360 lbs</td></tr> <tr><td>Engine (Cummins 3.8L)</td><td>120 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>50 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 15.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>3,800</td></tr> <tr><td>Hydraulic oil capacity</td><td>62 gal</td></tr> <tr><td>Length to fork face</td><td>22'</td></tr> <tr><td>Width</td><td>10' 1"</td></tr> <tr><td>Height</td><td>8' 2"</td></tr> <tr><td>Wheelbase</td><td>125"</td></tr> <tr><td>Ground clearance</td><td>16.5"</td></tr> <tr><td>Turning radius</td><td>12'</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	17,000 lbs	Max. lift height	34'	Forward reach	17'	Frame leveling L/R	11°	Weight	33,360 lbs	Engine (Cummins 3.8L)	120 hp (Tier 4F)	Fuel capacity	50 gal	Tires	Foam Filled 15.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	3,800	Hydraulic oil capacity	62 gal	Length to fork face	22'	Width	10' 1"	Height	8' 2"	Wheelbase	125"	Ground clearance	16.5"	Turning radius	12'	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>20,000 lbs</td></tr> <tr><td>Max. lift height</td><td>34'</td></tr> <tr><td>Forward reach</td><td>16' 7"</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>41,450 lbs</td></tr> <tr><td>Engine (Deutz 3.6L)</td><td>134 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 17.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,000</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>22' 7"</td></tr> <tr><td>Width</td><td>10' 2"</td></tr> <tr><td>Height</td><td>8' 11"</td></tr> <tr><td>Wheelbase</td><td>147"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>15' 10"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	20,000 lbs	Max. lift height	34'	Forward reach	16' 7"	Frame leveling L/R	8°	Weight	41,450 lbs	Engine (Deutz 3.6L)	134 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 17.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,000	Hydraulic oil capacity	58 gal	Length to fork face	22' 7"	Width	10' 2"	Height	8' 11"	Wheelbase	147"	Ground clearance	15'	Turning radius	15' 10"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>20,000 lbs</td></tr> <tr><td>Max. lift height</td><td>42'</td></tr> <tr><td>Forward reach</td><td>24' 10"</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>42,820 lbs</td></tr> <tr><td>Engine (Deutz 3.6L)</td><td>134 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 17.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,000</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>22' 6"</td></tr> <tr><td>Width</td><td>10' 2"</td></tr> <tr><td>Height</td><td>8' 11"</td></tr> <tr><td>Wheelbase</td><td>147"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>15' 10"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	20,000 lbs	Max. lift height	42'	Forward reach	24' 10"	Frame leveling L/R	8°	Weight	42,820 lbs	Engine (Deutz 3.6L)	134 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 17.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,000	Hydraulic oil capacity	58 gal	Length to fork face	22' 6"	Width	10' 2"	Height	8' 11"	Wheelbase	147"	Ground clearance	15'	Turning radius	15' 10"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>20,000 lbs</td></tr> <tr><td>Max. lift height</td><td>45'</td></tr> <tr><td>Forward reach</td><td>27' 4"</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>46,300 lbs</td></tr> <tr><td>Engine (Deutz 3.6L)</td><td>134 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 17.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,000</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>22' 6"</td></tr> <tr><td>Width</td><td>10' 2"</td></tr> <tr><td>Height</td><td>8' 11"</td></tr> <tr><td>Wheelbase</td><td>147"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>15' 10"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	20,000 lbs	Max. lift height	45'	Forward reach	27' 4"	Frame leveling L/R	8°	Weight	46,300 lbs	Engine (Deutz 3.6L)	134 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 17.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,000	Hydraulic oil capacity	58 gal	Length to fork face	22' 6"	Width	10' 2"	Height	8' 11"	Wheelbase	147"	Ground clearance	15'	Turning radius	15' 10"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>24,000 lbs</td></tr> <tr><td>Max. lift height</td><td>50'</td></tr> <tr><td>Forward reach</td><td>35'</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>56,560 lbs</td></tr> <tr><td>Engine (Cummins 4.5L)</td><td>173 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 16 x 25-28</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,300</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>23' 11"</td></tr> <tr><td>Width</td><td>10' 2"</td></tr> <tr><td>Height</td><td>9' 6"</td></tr> <tr><td>Wheelbase</td><td>148"</td></tr> <tr><td>Ground clearance</td><td>15'</td></tr> <tr><td>Turning radius</td><td>16' 8"</td></tr> <tr><td>Warranty</td><td>Xtreme 10-5-2</td></tr> </table> 	Capacity	24,000 lbs	Max. lift height	50'	Forward reach	35'	Frame leveling L/R	8°	Weight	56,560 lbs	Engine (Cummins 4.5L)	173 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 16 x 25-28	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,300	Hydraulic oil capacity	58 gal	Length to fork face	23' 11"	Width	10' 2"	Height	9' 6"	Wheelbase	148"	Ground clearance	15'	Turning radius	16' 8"	Warranty	Xtreme 10-5-2	<table border="0"> <tr><td>Capacity</td><td>30,000 lbs</td></tr> <tr><td>Max. lift height</td><td>34'</td></tr> <tr><td>Forward reach</td><td>17' 6"</td></tr> <tr><td>Frame leveling L/R</td><td>8°</td></tr> <tr><td>Weight</td><td>49,100 lbs</td></tr> <tr><td>Engine (Cummins 4.5L)</td><td>173 hp (Tier 4F)</td></tr> <tr><td>Fuel capacity</td><td>72 gal</td></tr> <tr><td>Tires</td><td>Foam Filled 23.5 x 25</td></tr> <tr><td>Hydraulic flow (GPM)</td><td>49</td></tr> <tr><td>Hydraulic pressure (PSI)</td><td>4,500</td></tr> <tr><td>Hydraulic oil capacity</td><td>58 gal</td></tr> <tr><td>Length to fork face</td><td>2</td></tr></table>	Capacity	30,000 lbs	Max. lift height	34'	Forward reach	17' 6"	Frame leveling L/R	8°	Weight	49,100 lbs	Engine (Cummins 4.5L)	173 hp (Tier 4F)	Fuel capacity	72 gal	Tires	Foam Filled 23.5 x 25	Hydraulic flow (GPM)	49	Hydraulic pressure (PSI)	4,500	Hydraulic oil capacity	58 gal	Length to fork face	2
Capacity	15,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	55'																																																																																																																																																																																																																																																																																																																															
Forward reach	38' 5"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																															
Weight	38,450 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	100 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	3,800																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	25' 9"																																																																																																																																																																																																																																																																																																																															
Width	10' 1"																																																																																																																																																																																																																																																																																																																															
Height	8' 3"																																																																																																																																																																																																																																																																																																																															
Wheelbase	141"																																																																																																																																																																																																																																																																																																																															
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																															
Turning radius	14'																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	15,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	70'																																																																																																																																																																																																																																																																																																																															
Forward reach	53' 10"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	48,480 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Deutz 3.6L)	134 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 17.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,000																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	26' 6"																																																																																																																																																																																																																																																																																																																															
Width	10' 1"																																																																																																																																																																																																																																																																																																																															
Height	10' 2"																																																																																																																																																																																																																																																																																																																															
Wheelbase	147"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	15' 10"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	15,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	85'																																																																																																																																																																																																																																																																																																																															
Forward reach	67'																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	65,500 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Cummins 4.5L)	173 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	100 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 16 x 25-28																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,000																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	70 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	28' 8"																																																																																																																																																																																																																																																																																																																															
Width	10' 1"																																																																																																																																																																																																																																																																																																																															
Height	10' 2"																																																																																																																																																																																																																																																																																																																															
Wheelbase	147"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	16' 8"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	17,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	34'																																																																																																																																																																																																																																																																																																																															
Forward reach	17'																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	11°																																																																																																																																																																																																																																																																																																																															
Weight	33,360 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Cummins 3.8L)	120 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	50 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 15.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	3,800																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	62 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	22'																																																																																																																																																																																																																																																																																																																															
Width	10' 1"																																																																																																																																																																																																																																																																																																																															
Height	8' 2"																																																																																																																																																																																																																																																																																																																															
Wheelbase	125"																																																																																																																																																																																																																																																																																																																															
Ground clearance	16.5"																																																																																																																																																																																																																																																																																																																															
Turning radius	12'																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	20,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	34'																																																																																																																																																																																																																																																																																																																															
Forward reach	16' 7"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	41,450 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Deutz 3.6L)	134 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 17.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,000																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	22' 7"																																																																																																																																																																																																																																																																																																																															
Width	10' 2"																																																																																																																																																																																																																																																																																																																															
Height	8' 11"																																																																																																																																																																																																																																																																																																																															
Wheelbase	147"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	15' 10"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	20,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	42'																																																																																																																																																																																																																																																																																																																															
Forward reach	24' 10"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	42,820 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Deutz 3.6L)	134 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 17.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,000																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	22' 6"																																																																																																																																																																																																																																																																																																																															
Width	10' 2"																																																																																																																																																																																																																																																																																																																															
Height	8' 11"																																																																																																																																																																																																																																																																																																																															
Wheelbase	147"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	15' 10"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	20,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	45'																																																																																																																																																																																																																																																																																																																															
Forward reach	27' 4"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	46,300 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Deutz 3.6L)	134 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 17.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,000																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	22' 6"																																																																																																																																																																																																																																																																																																																															
Width	10' 2"																																																																																																																																																																																																																																																																																																																															
Height	8' 11"																																																																																																																																																																																																																																																																																																																															
Wheelbase	147"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	15' 10"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	24,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	50'																																																																																																																																																																																																																																																																																																																															
Forward reach	35'																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	56,560 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Cummins 4.5L)	173 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 16 x 25-28																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,300																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	23' 11"																																																																																																																																																																																																																																																																																																																															
Width	10' 2"																																																																																																																																																																																																																																																																																																																															
Height	9' 6"																																																																																																																																																																																																																																																																																																																															
Wheelbase	148"																																																																																																																																																																																																																																																																																																																															
Ground clearance	15'																																																																																																																																																																																																																																																																																																																															
Turning radius	16' 8"																																																																																																																																																																																																																																																																																																																															
Warranty	Xtreme 10-5-2																																																																																																																																																																																																																																																																																																																															
Capacity	30,000 lbs																																																																																																																																																																																																																																																																																																																															
Max. lift height	34'																																																																																																																																																																																																																																																																																																																															
Forward reach	17' 6"																																																																																																																																																																																																																																																																																																																															
Frame leveling L/R	8°																																																																																																																																																																																																																																																																																																																															
Weight	49,100 lbs																																																																																																																																																																																																																																																																																																																															
Engine (Cummins 4.5L)	173 hp (Tier 4F)																																																																																																																																																																																																																																																																																																																															
Fuel capacity	72 gal																																																																																																																																																																																																																																																																																																																															
Tires	Foam Filled 23.5 x 25																																																																																																																																																																																																																																																																																																																															
Hydraulic flow (GPM)	49																																																																																																																																																																																																																																																																																																																															
Hydraulic pressure (PSI)	4,500																																																																																																																																																																																																																																																																																																																															
Hydraulic oil capacity	58 gal																																																																																																																																																																																																																																																																																																																															
Length to fork face	2																																																																																																																																																																																																																																																																																																																															