


SPECIFICATIONS		
Lift capacity	25,000 lbs	11,339kg
Max lift height	85'	25.9m
Forward reach	55' 4"	16.86m
Frame leveling L/R	8°	
Weight*	82,000 lbs	37,194kg
Engine (Cummins 6.7L)	250 hp (Tier 4F)	
Axles	Kessler 91.8938.3	
Transmission	Dana T32000	
Fuel capacity	100 gal	378 L
Tires	foam filled 23.5 R25	
Hydraulic flow (per min)	49	185.4L
Hydraulic pressure	4,000 psi	275.8bar
Hydraulic oil capacity	100 gal	378L
Length to fork face	36' 6"	11.13m
Width	118"	2.99m
Height	9' 10"	2.99m
Wheelbase	168"	4.26m
Ground clearance	18"	457mm
Turning radius	23'	7.01m

*Weight based on closed cab model with AC and foam filled tires.

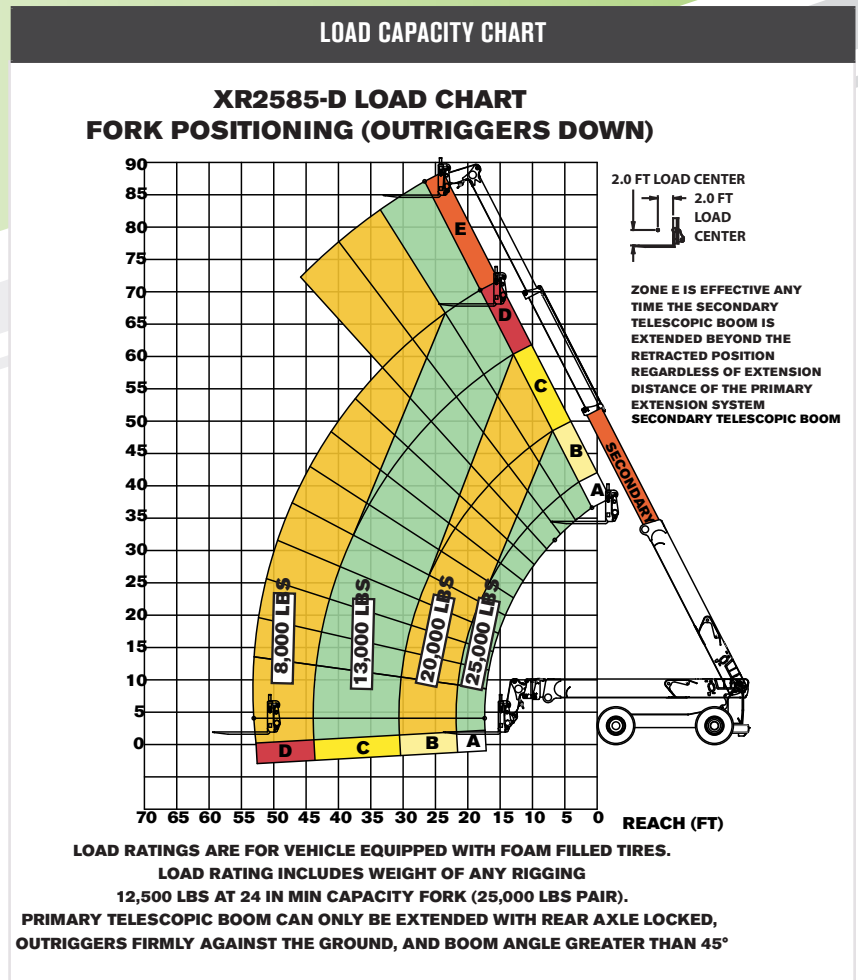

STANDARD FEATURES

360° operator visibility	Ductile steel manifold
Suspension seat	Easy cab mounted grab handles
Easy service access	Master disconnect switch
Protected tilt & extend cylinders	Boom lift point
Steel hydraulic & fuel tanks	Manual lowering valve (cylinders)
Long life Lexan labels	Large cross section boom
Suspended pedals	Easy tie downs
Large capacity fuel tank	"Y" frame handle
Trunnion mounted sway cylinders	Heavy duty pre-cleaner
Melonite pins	Additional high pressure hydraulic filter
Standard auxiliary hydraulics	Steel hood
Steel dash	Solid steel plate chassis
Center mounted powertrain	Rear axle stabilization (RAS)
Long life boom rollers	Back up alarm with light
Dual batteries	Cab step